




OPEN
IN

STANDARD

TRIPLE GLAZING $U_w=0,8 \text{ W/m}^2\text{K}$

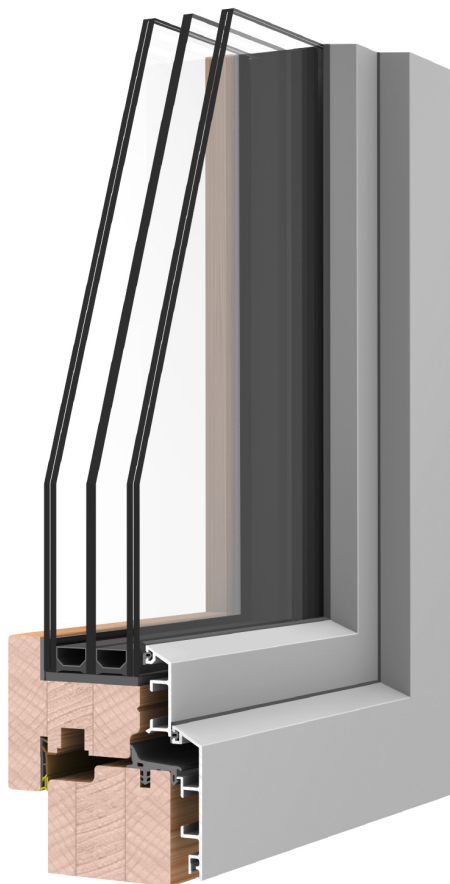

Material		Wood-Aluminium
----------	---	----------------

Thermal insulation		$U_w= 0,8 \text{ W/m}^2\text{K}$
--------------------	---	----------------------------------

Insulating glass		Triple glazing thickness 49-52mm
------------------	---	-------------------------------------

Acoustic insulation		Rw up to 43 dB
---------------------	---	----------------

Security hardware		Up to RC2
-------------------	---	-----------

Dimensions in mm.	
Thickness of sash	83,5 x 70mm
Thickness of frame	77,5 x 70mm
Visible section sash + frame	106mm
Visible section middle clamp	116mm

Air permeability		CLASS 4
------------------	---	---------


Water tightness		CLASS E1050
-----------------	--	-------------

Wind load resistance		CLASS C5
----------------------	---	----------

The thermal transmittance values are calculated according to
UNI EN 10077/1-2018, UNI EN 10077/2-2018,
UNI EN 10456-2008, UNI EN 673-2011 standards,
in reference to a window with 1 sash
WxH (1230x1480mm, $\psi_g= 0,04 \text{ W/mK}$)

The air-water-wind tightness performances are estimated in reference to a
window with 2 sashes WxH (1500x1500mm)

The acoustic insulation values are estimated in reference to a
window with 1 sash WxH (1500x1500mm)

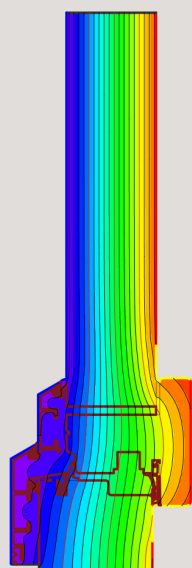

STANDARD - 49mm glass SOFT WOOD $U_f = 1,2 \text{ W/m}^2\text{K}$

$U_g \text{ W/m}^2\text{K}$		$U_w \text{ W/m}^2\text{K}$
0,5	->	0,8
0,6	->	0,9
0,7	->	0,9
0,8	->	1,0
0,9	->	1,1
1,0	->	1,2
1,1	->	1,3